

12"  
304.8mm

6"  
152.4mm



# 1 Dial 1 Outlet HOSE FAUCET TIMER

Temporizador de grifo de manguera de 1 selector y 2 salidas

Important, please read!




When expecting freezing temperatures, timers should be removed from the hose faucet and stored indoors to avoid potential freeze damage.



Filter traps dirt particles, prolonging life of timer. Clean filter regularly and replace if worn.

## TIMER FEATURES

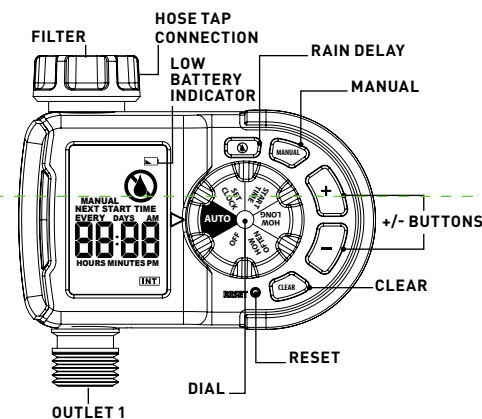

## TIMER FEATURES


**DIAL**—Rotate the dial to customize your watering schedule

**RAIN DELAY**—Use this button to select RAIN DELAY mode

**RESET**—Press to clear all programming

**MANUAL**—Press to water manually

**CLEAR**—Press to clear programming

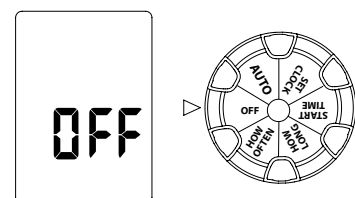

**+/- BUTTONS**—Use these buttons to adjust time and system setup

**AUTO**—Timer waters according to your customized schedule

**SET CLOCK**—Set the time of day

**START TIME**—Select what time you would like to start watering

**HOW LONG**—Determine how long to water

**HOW OFTEN**—Choose how often you will water

**OFF**—Turn off all watering


## INSTALLING THE BATTERIES

1. Remove the tray on the back of the timer by sliding or pulling it out.
2. Insert two AAA (1.5V) alkaline batteries (not included) and replace the tray.

**NOTE:** Firmly replace the battery tray to ensure water resistance and increase battery life. You will know the battery tray is fully inserted if it does not pull out easily. Used up or dead batteries must be removed from the timer and disposed of properly. Replace batteries when low battery icon appears on display. Do not dispose of batteries in fire. Batteries may explode or leak.


## PROGRAMMING THE TIMER

### SET CLOCK

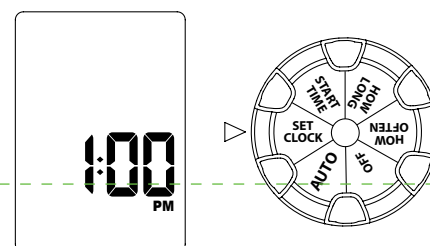


1. Turn dial to SET CLOCK.
2. Using the +/- buttons, set the time of day, including AM and PM. Timer advances faster if button is held down.
3. Turn dial to save changes.

### START TIME

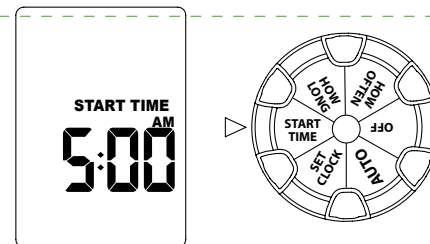


1. Turn dial to START TIME.
2. Using the +/- buttons, set your start time, including AM and PM. Timer advances faster if button is held down.
3. Turn dial to save changes.

### HOW LONG

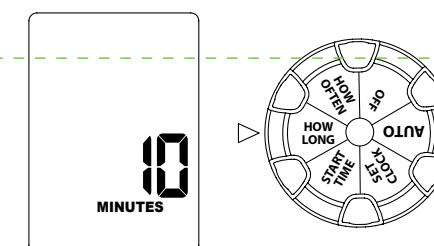

1. Turn dial to HOW LONG.
2. Using the +/- buttons, select watering duration from 1 to 360 minutes. Timer advances faster if button is held down.
3. Press CLEAR button to reset run time.
4. Turn dial to save changes.

### HOW OFTEN

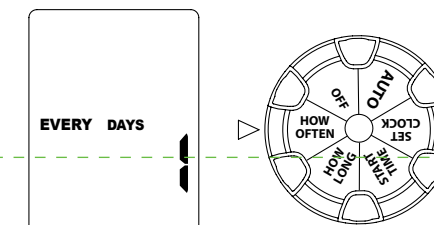

1. Turn dial to HOW OFTEN.
2. Using the +/- buttons, set your watering frequency. You may choose to water every 1 hour, 2 hours, 4 hours, 6 hours, 12 hours, or from 1 to 7 days.

Orbit®  
DATE: 05/26/2015  
DESIGNER: NK  
MARKETING: SW  
ARTWORK N°: 56419-24rC  
SOFTWARE: Adobe Indesign CS6

Printed on recycled paper with 100% post-consumer waste. Any changes made to this document must be approved by the marketing department. © 2015 Orbit, Inc. This work is the property of Orbit, Inc. All rights reserved. No part of this work may be reproduced without the written permission of Orbit, Inc.

Product Information  
Product Name: Orbit 1 Dial 1 Outlet Hose Faucet Timer  
Product Code: 24695-24 rA  
Product Description: 1 Dial 1 Outlet Hose Faucet Timer  
Product Dimensions: 12.0" W x 6.0" H  
Product Weight: 1.5 lbs  
Product Material: Bleached Paper  
Product Color: White  
Product Finish: Matte  
Product Country of Origin: China

Additional Information  
Address: 11817 131st St  
City: Everett, WA 98203  
Phone: (425) 336-1111  
Fax: (425) 336-1112  
Email: info@orbit.com  
Website: www.orbit.com

Raw Part Num: 24695-24 rA  
Size (in.): 12" W x 6" H  
Size (mm): 304.8 W x 152.4 H  
Material: Bleached paper  
Basis Weight: 18 lbs Calliper: 3.6 Mil  
Package Format: Instruction Sheet  
100% Scale  
Outside-face  
Outside Color: White  
Date: 1/29/2014  
Designer: J. Smolarski

12"  
304.8mm


6"  
152.4mm

**NOTE:** 1 is every day, 2 is every other day, etc  
3. Turn dial to save changes

**CONGRATULATIONS!**  
Your timer is now programmed. Turn your dial to AUTO to allow your timer to water according to programmed time, station, duration, and frequency.

### ADDITIONAL FEATURES


#### RAIN DELAY

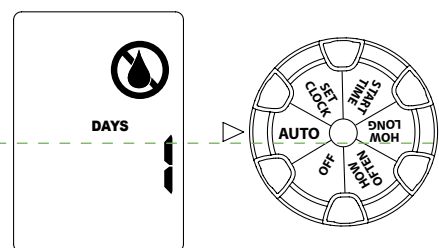

Rain delay allows you to postpone watering for a set period of time. To access the rain delay, follow the steps below.

1. With the dial on AUTO, press the button.
2. Using the +/- buttons select a delay of 1 to 7 days.
3. Screen will flash between clock and hours remaining before programmed cycle resumes.
4. To remove rain delay, turn dial to OFF and then back to AUTO.

#### MANUAL/HAND WATERING

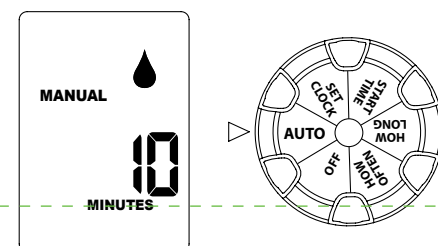

This feature allows you to water without interrupting your set schedule. To access this feature, follow the steps below.

1. With the dial on AUTO, press the MANUAL button.
2. Use the +/- buttons to select watering time from 1 to 360 minutes.
3. Screen will flash between clock and hours remaining before programmed cycle resumes.

**NOTE:** There may be a slight delay between the time the manual button is pressed and when watering begins.

4. To stop manual watering, turn the dial to OFF.
5. Turn the dial back to AUTO to resume your programmed watering schedule.

#### TROUBLESHOOTING

##### WATER DOES NOT COME ON AT DESIRED TIME.

Check if:

- Clock is set to correct time, including AM and PM.
- Dial is set to "Auto"
- Start time is set to desired time, including AM and PM.
- Rain Delay is on.

##### TIMER DOES NOT WATER.

Check if:

- Timer is set to AUTO.
- Hose faucet is on.
- Batteries are low.
- Clock is set to correct time, including AM and PM.
- Rain Delay is on.

##### WATER WON'T TURN OFF.

Check if:

- HOW LONG is set to desired time.
- HOW OFTEN is set to desired interval hour or day.

##### WORKING WATER PRESSURE:

- Minimum: 10 psi
- Maximum: 100 psi

##### WORKING TEMPERATURE:

- Maximum: Do not exceed 120°F
- Minimum: Keep from freezing

##### WARNINGS:

For outdoor use with cold water only.  
Not for use with appliances.



Customer Service  
1-800-488-6156

Orbit® Irrigation Products, Inc.  
North Salt Lake, UT 84054

© 2015 Orbit Irrigation Products, Inc.  
All rights reserved. All trade names are registered trademarks of respective manufacturers listed.

PN 56619-24 rC

Raw Part Num: 24695-24 rA  
Size (in.): 12" W x 6" H  
Size (mm): 304.8 W x 152.4 H  
Material: Bleached paper  
Basis Weight: 18 lbs Calliper: 3.6 Mil  
Package Format: Instruction Sheet  
100% Scale  
Outside-face  
Outside Color: White  
Date: 1/29/2014  
Designer: J. Smolarski